


F-2908

230 V ~ 50/60 Hz • 210 W

12 - 24 V
4 - 8 A

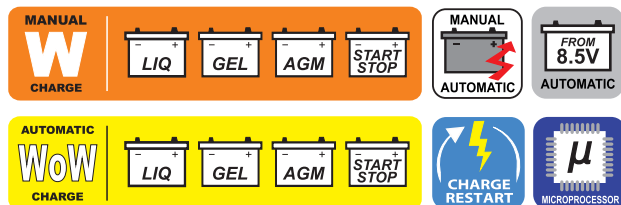

235 x 140 x 195 mm
4,900 kg

4-8A

12V
24V

88.8

DIGITAL VOLTMETER



CARACTERÍSTICAS:

- Cargador manual / automático y mantenedor.
- Tensión de la batería: **12 - 24 V**
- Intensidad: **4 - 8 A**
- Para baterías de plomo-ácido: líquidas, gel y AGM.
- Baterías recomendadas: de **24 a 95 Ah** de capacidad.
- Voltímetro digital.
- Controlado por microprocesador.
- Función *Charge Restart*: En caso de interrupción de la corriente eléctrica, el cargador se reinicia cuando se restablece el suministro, conservando el último programa de carga seleccionado.
- Doble aislamiento.
- Potencia máxima consumida: 210 W
- Tensión de alimentación: 230 V ~ 50/60 Hz
- Dimensiones: 235 x 140 x 195 mm
- Peso: 4,900 kg

FEATURES:

- Manual/automatic charger and maintainer.
- Battery voltage: **12-24V**
- Intensity: **4-8A**
- For lead-acid batteries: liquid, gel and AGM.
- Recommended battery capacity: **24 to 95Ah**.
- Digital voltmeter
- Controlled by microprocessor.
- *Charge Restart* function: In case of interruption of the electrical current, the charger restarts when supply is restored, preserving the last selected charging program.
- Double insulation.
- Maximum power consumed: 210W
- Supply voltage: 230V ~ 50/60Hz
- Dimensions: 235 x 140 x 195mm
- Weight: 4.900g