


FERVE

F-1708



CE



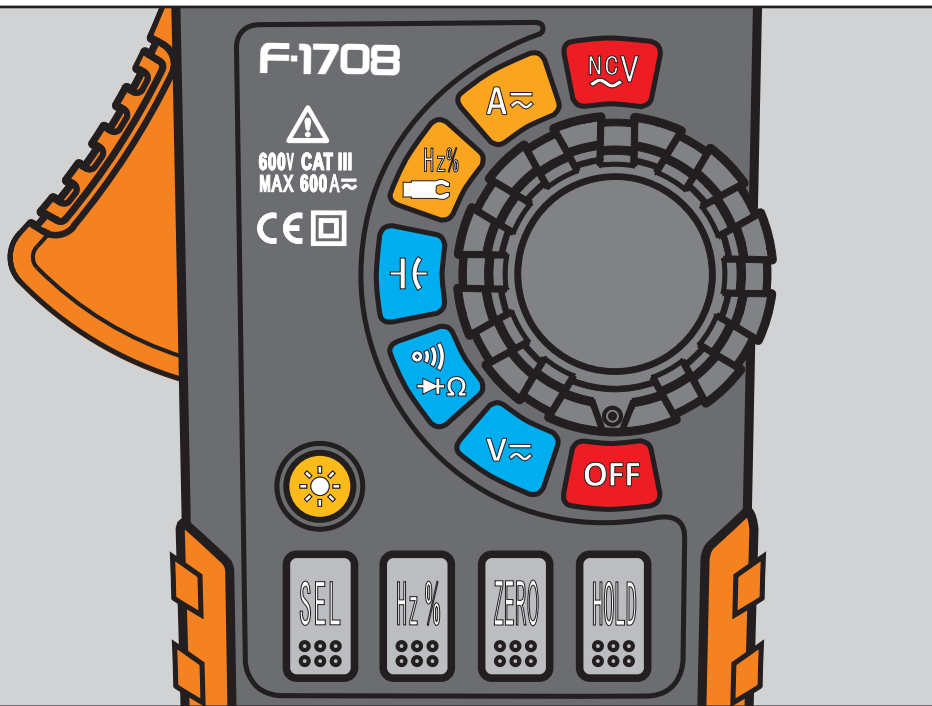

1

$\equiv V$

PAG.
5-6-7-8-9-10
11-12-13

5

$\rightarrow +$

PAG.
18

2

$\sim V$

PAG.
14, 15

6

∇

PAG.
19

3

Ω

PAG.
16

7

**Hz %
**

PAG.
20, 21

4

$\circ))$

PAG.
17

8

$\equiv A$

PAG.
22, 23, 24, 25

9



PAG.
26, 27

13



PAG.
15, 21

10



PAG.
28

14



PAG.
22, 24, 26

11



PAG.
29

15



PAG.
31

12







PAG.
14, 26, 30



16







PAG.
32

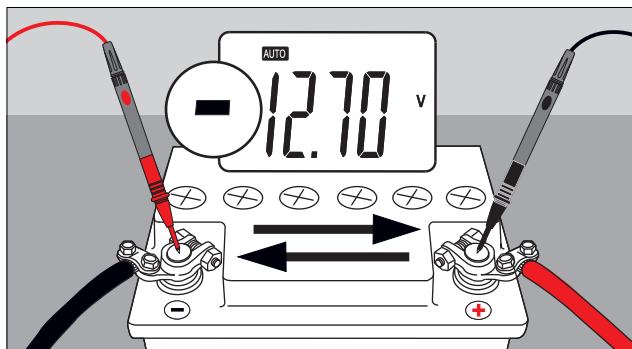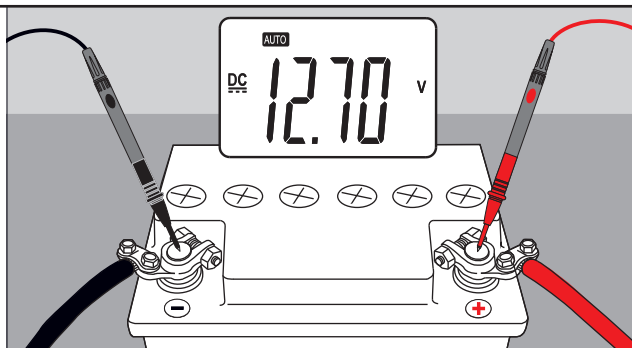
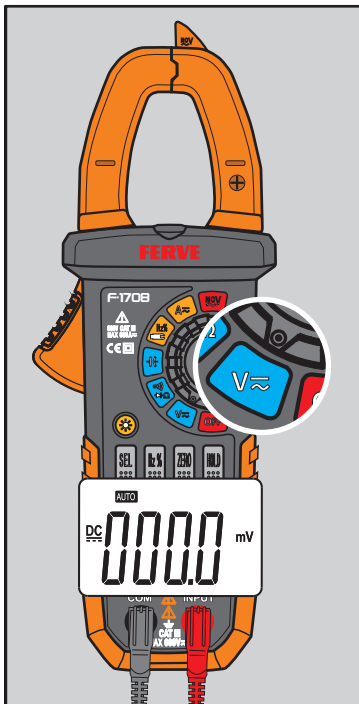



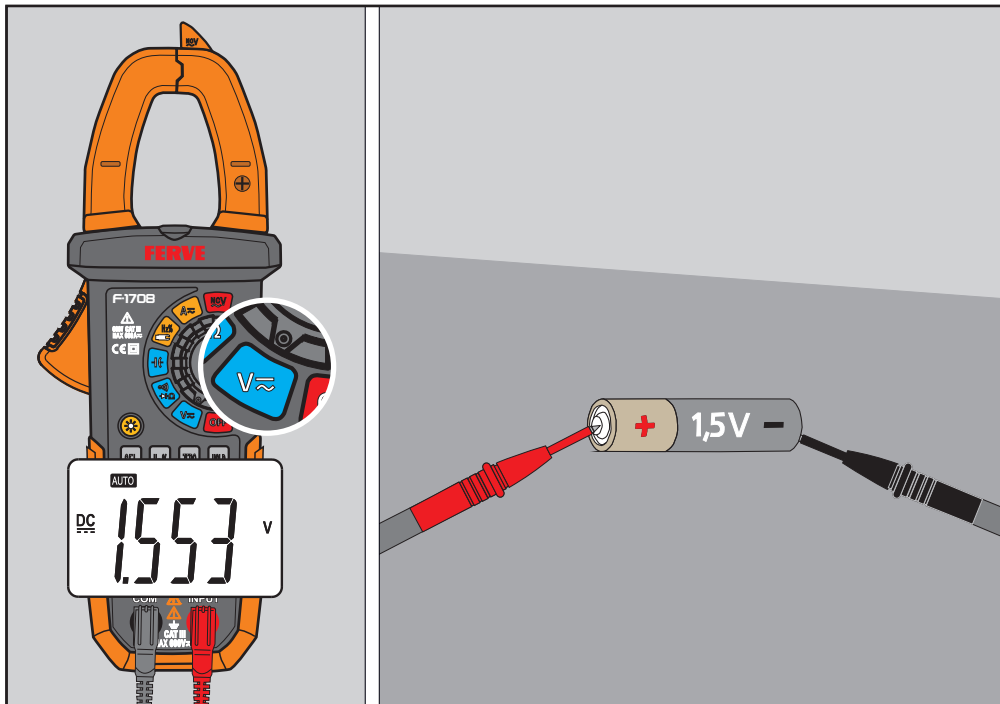


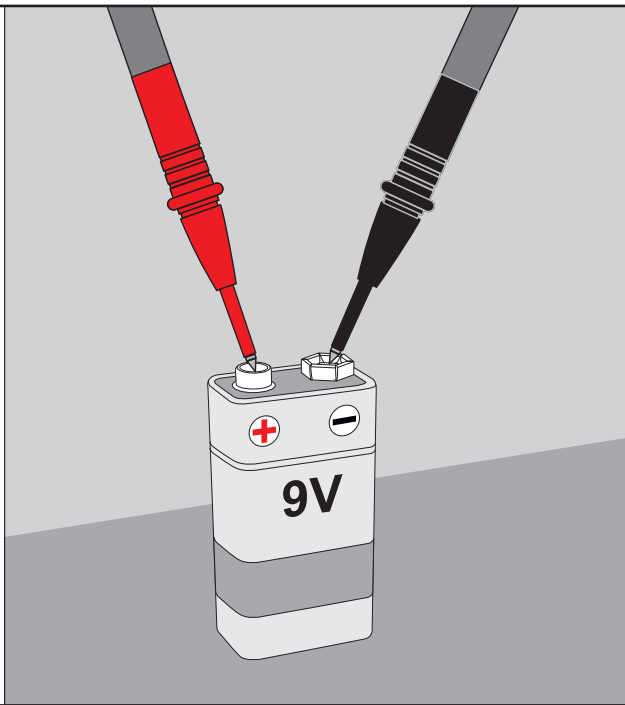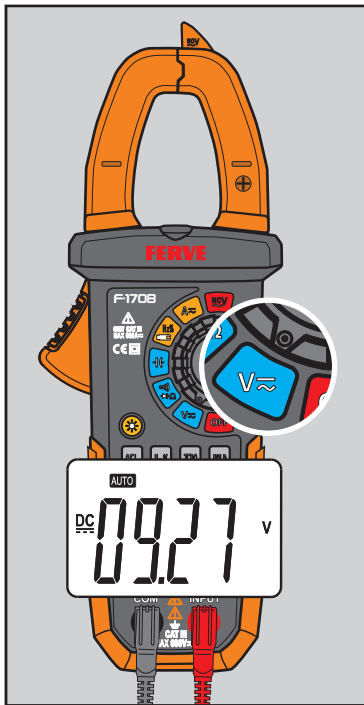


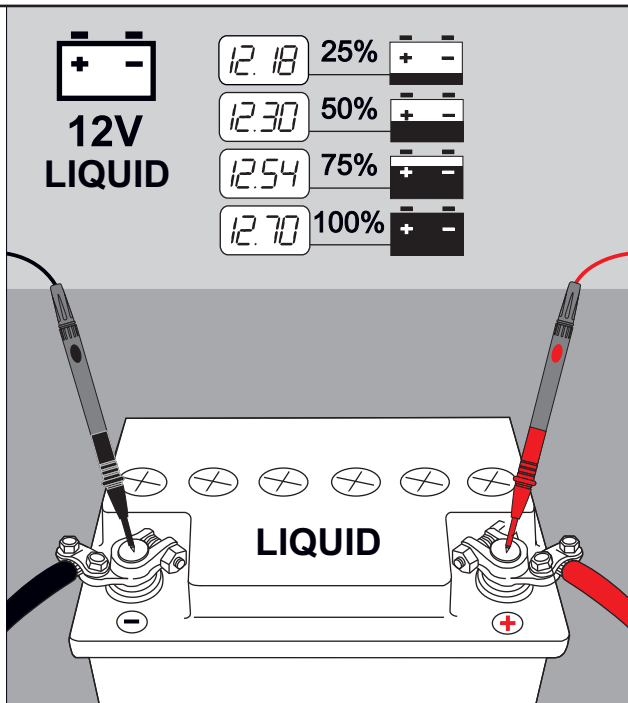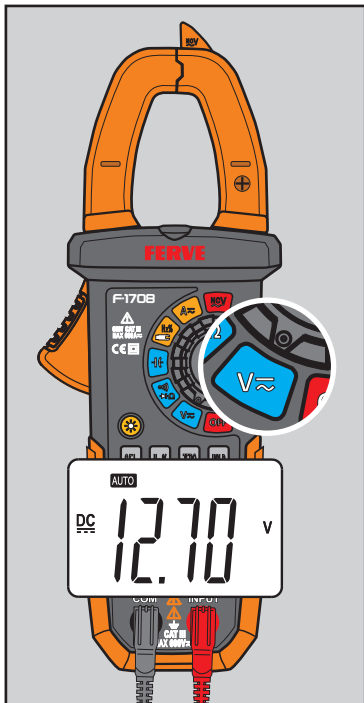

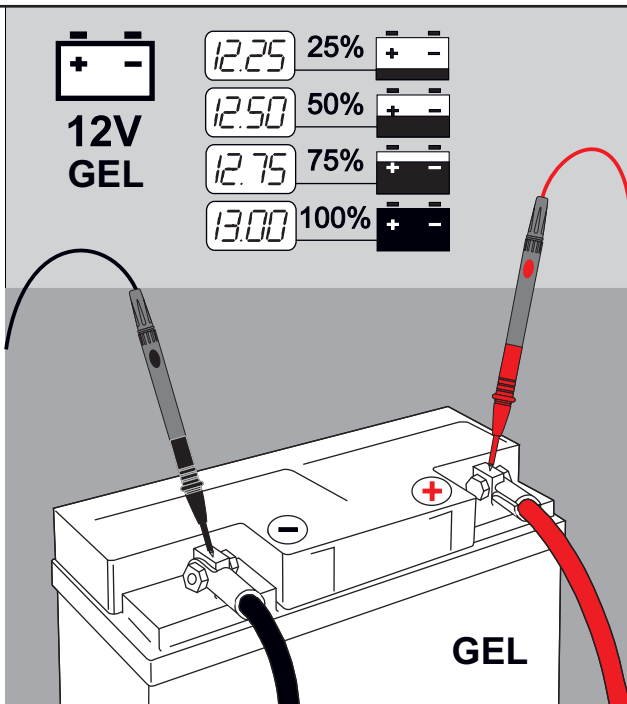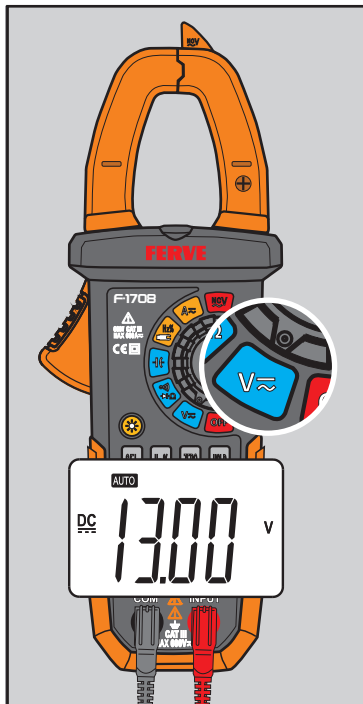


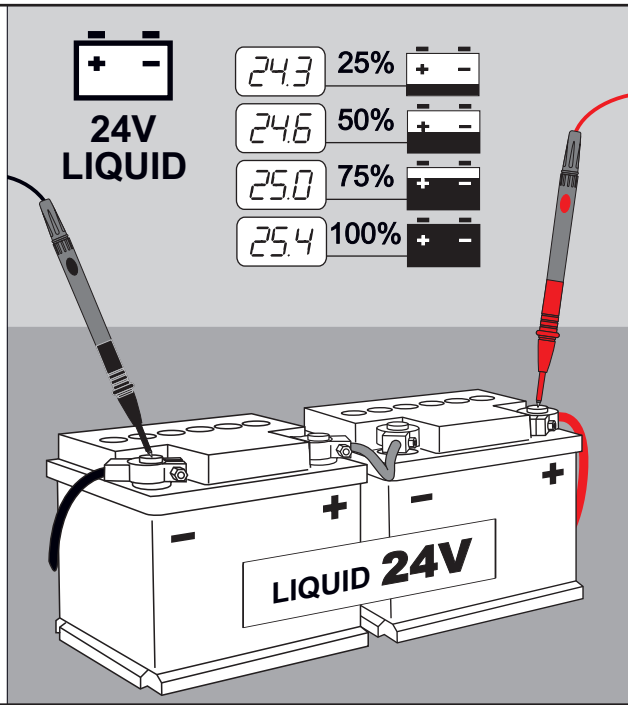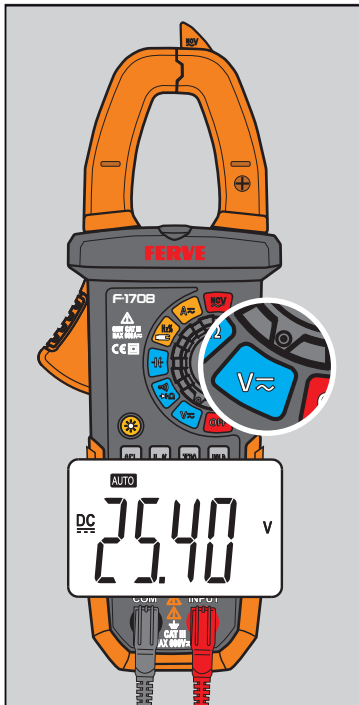

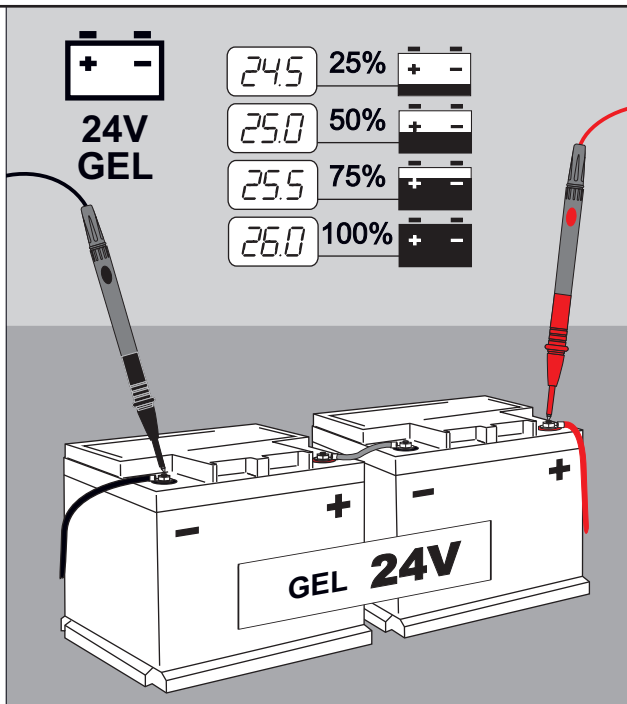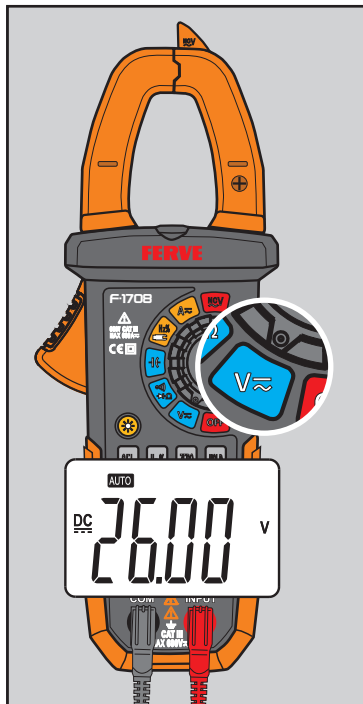

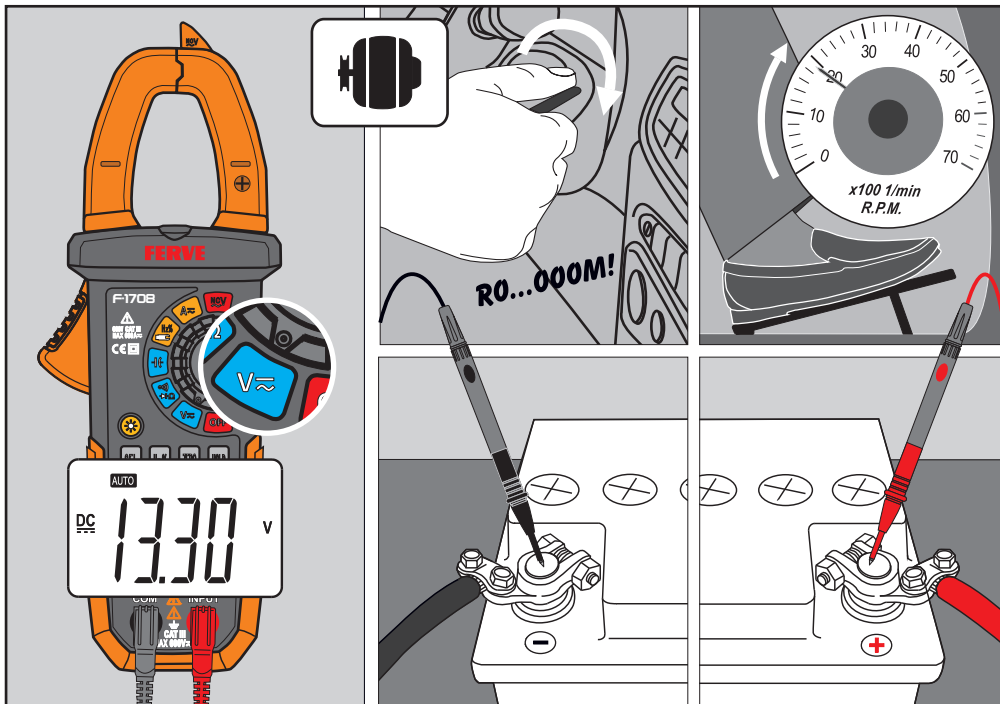

12 V



2000 rpm

< 13.30



13.30 / 14.80



OK

> 14.80



24 V



< 26.60



26.60 / 29.60




OK


> 29.60




1


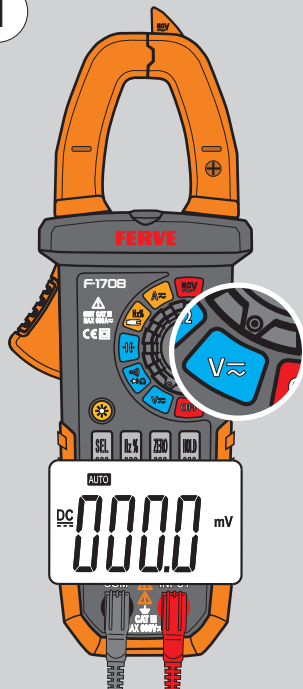





2



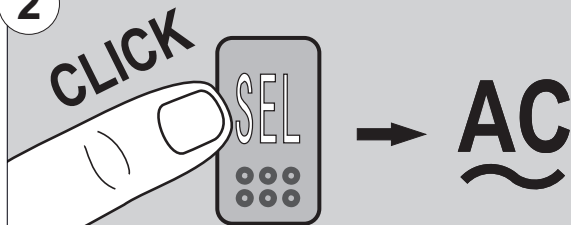




3



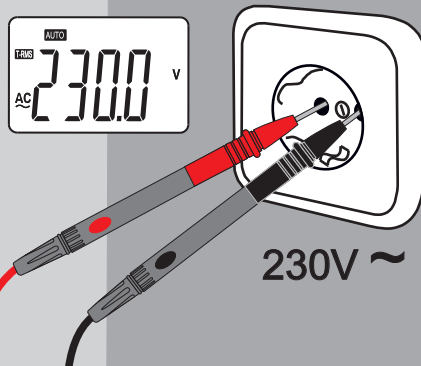


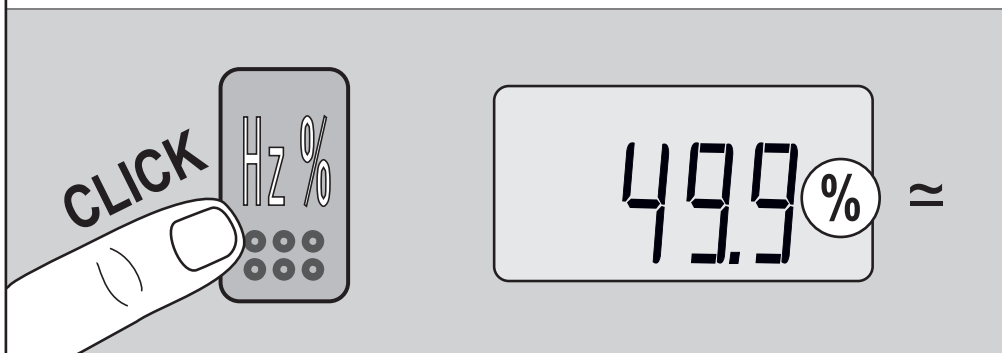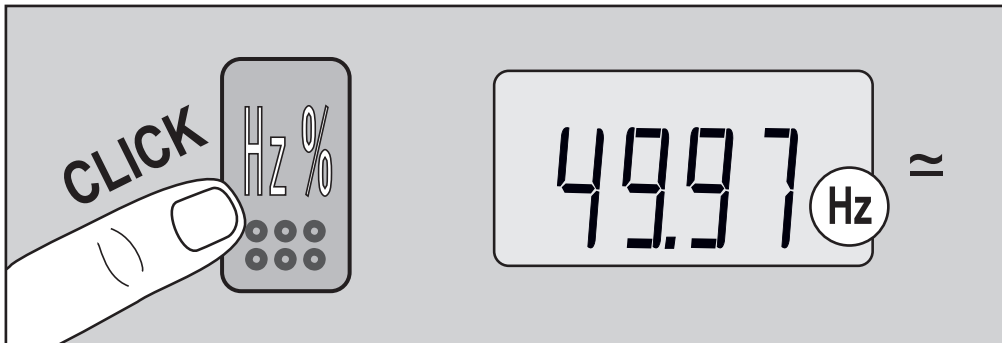


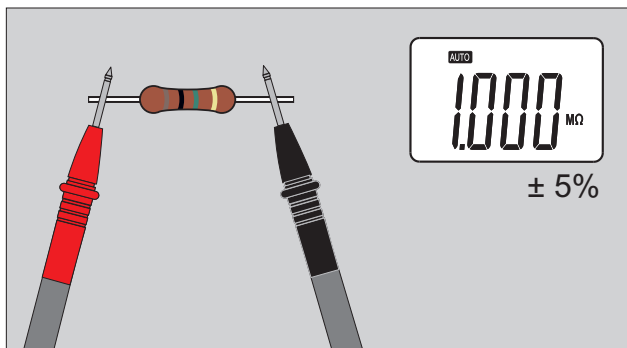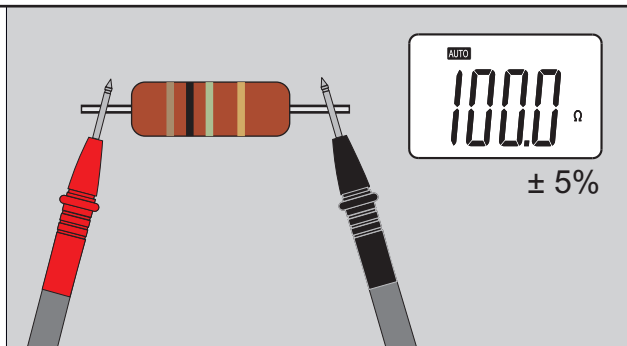
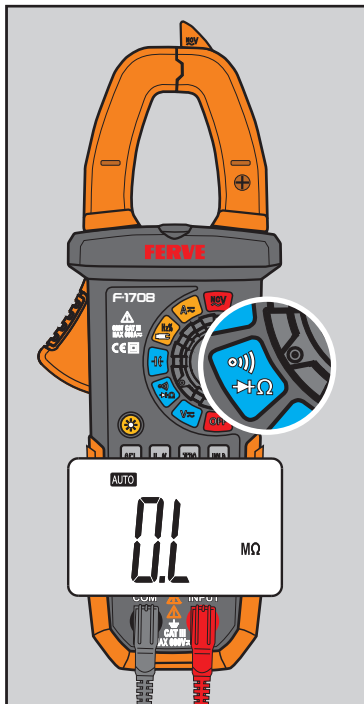


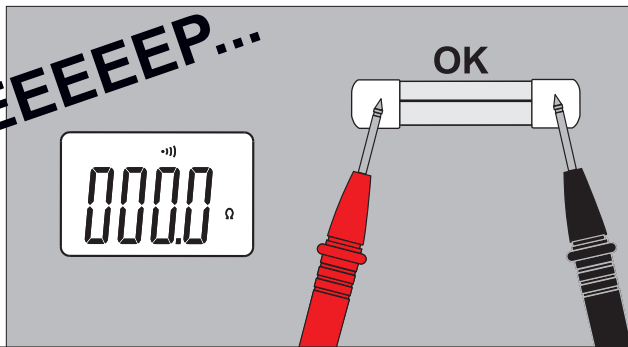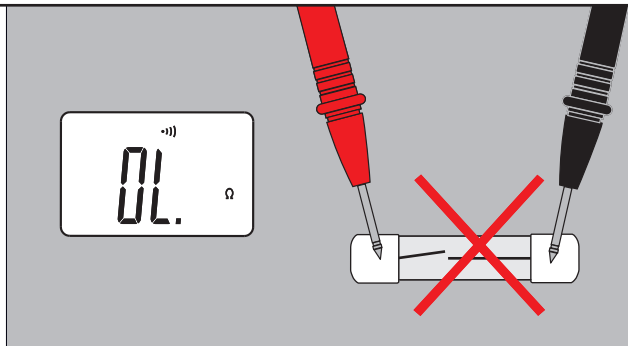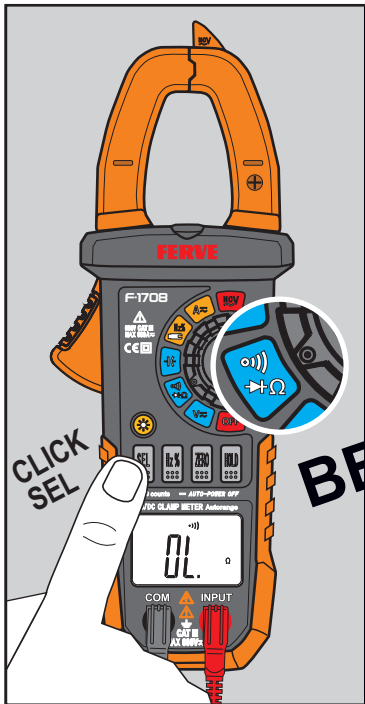

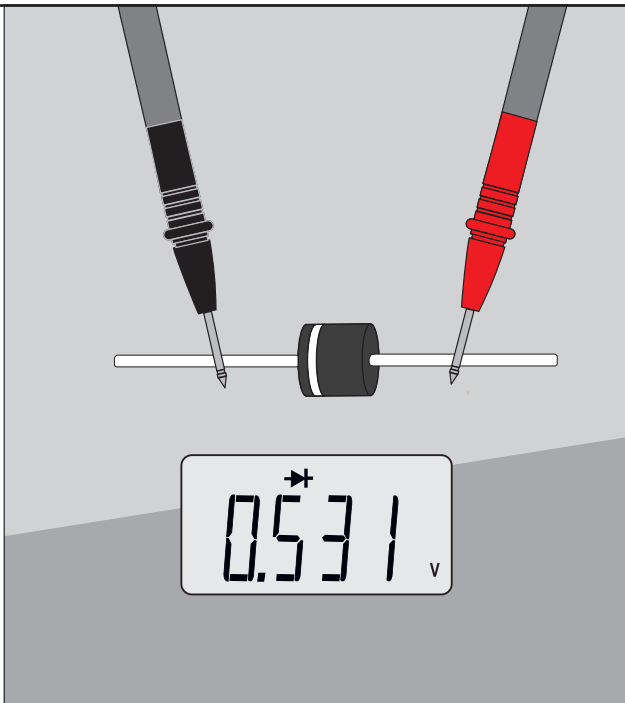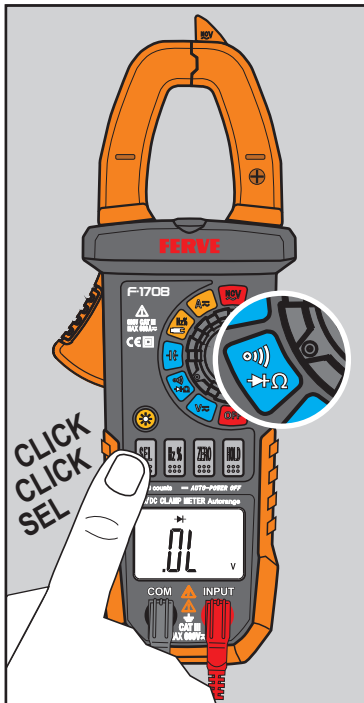


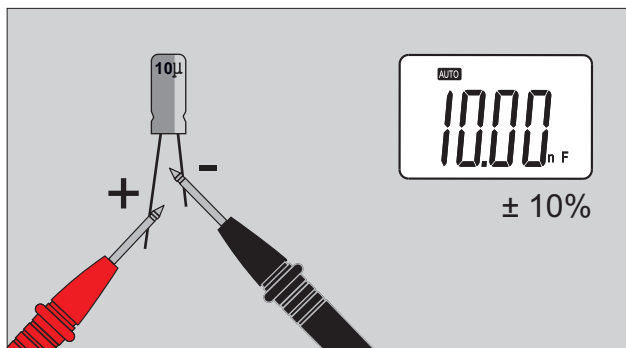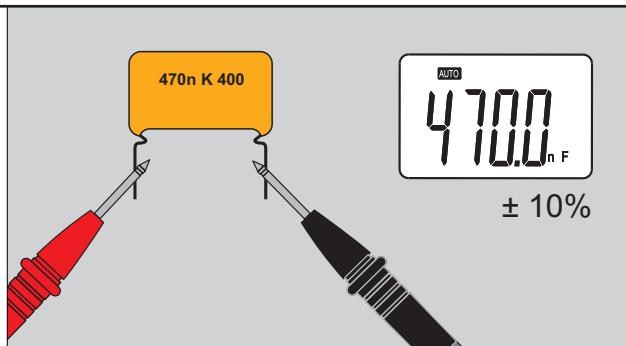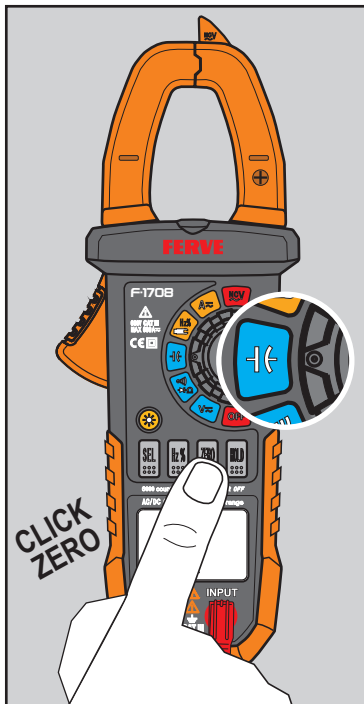

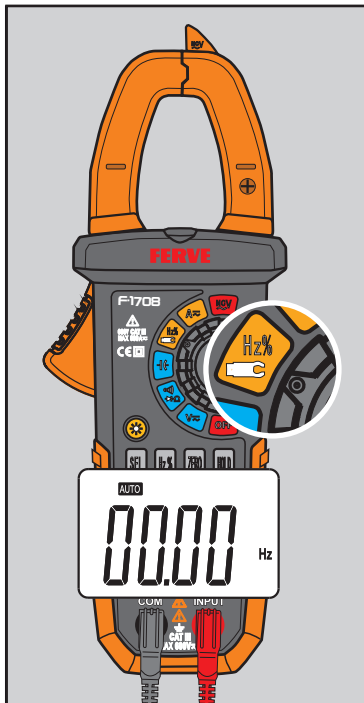


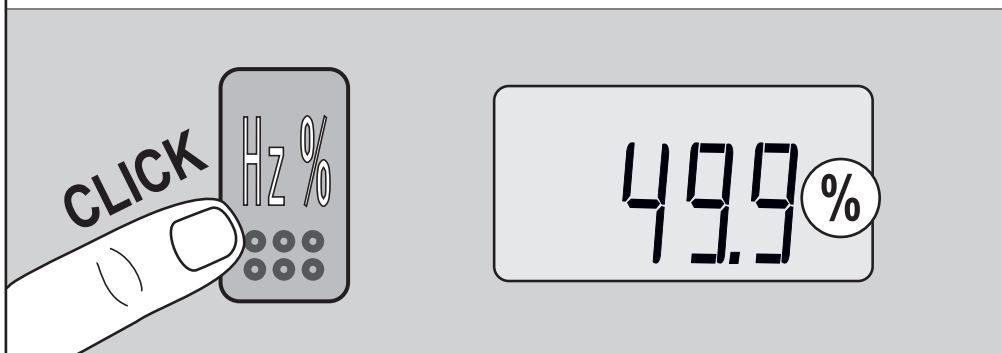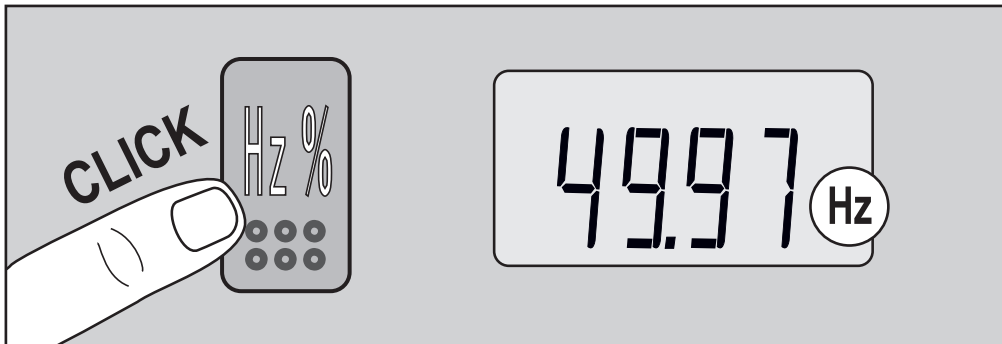


1

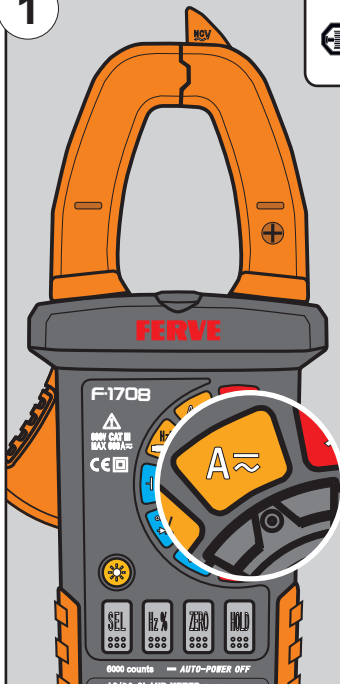


2

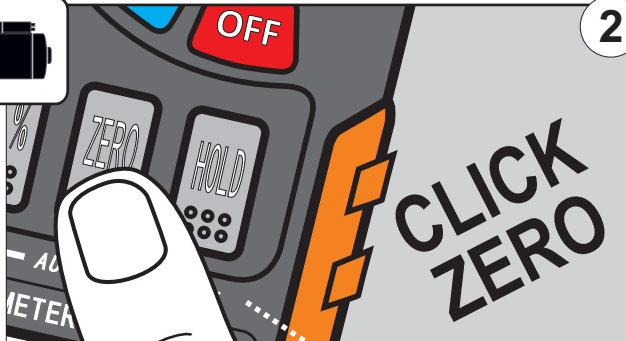


3

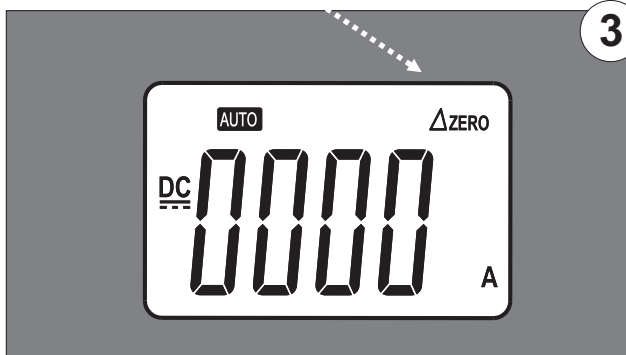


4

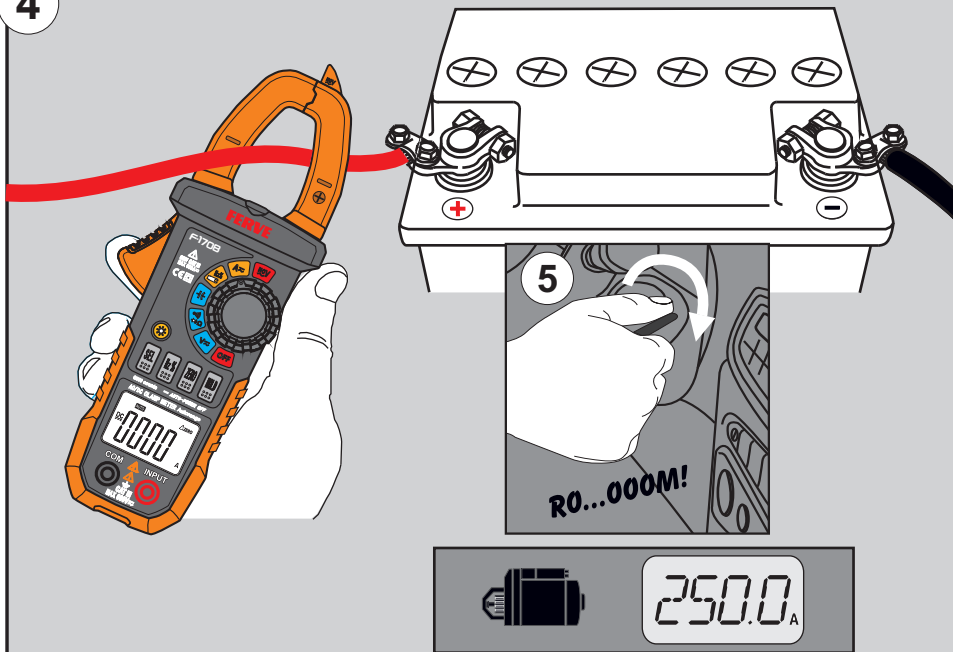


1

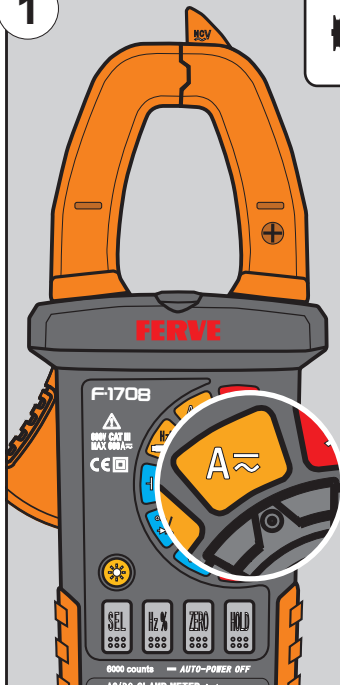



2

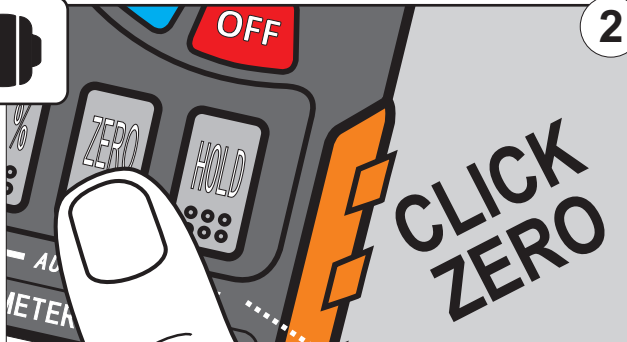


3

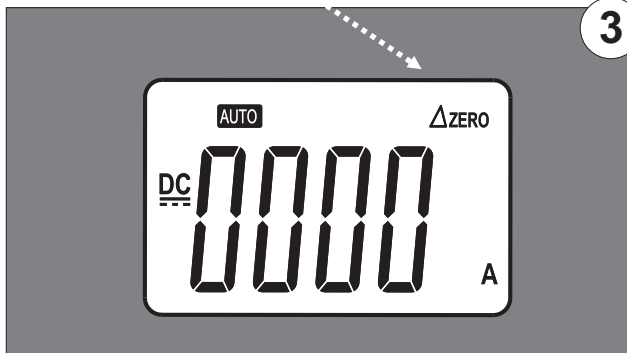


4

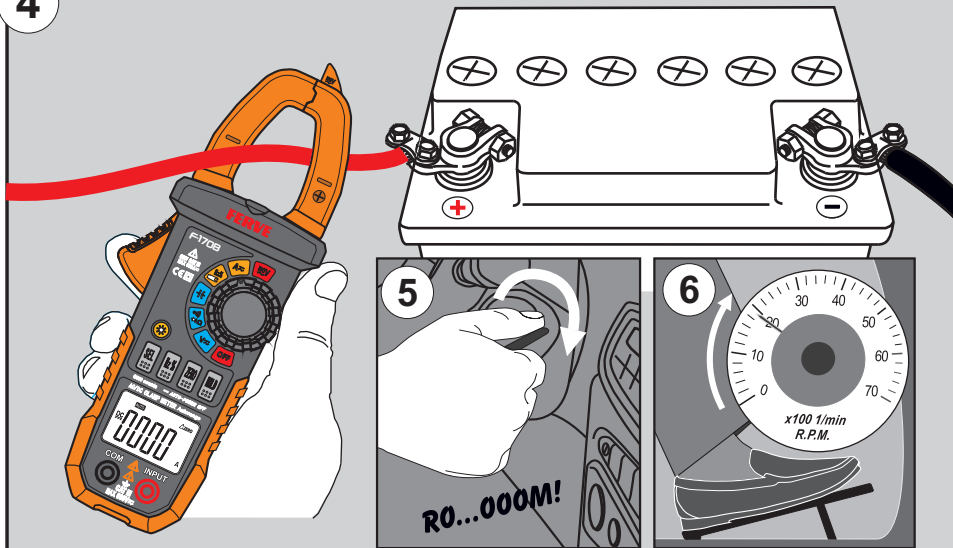


1

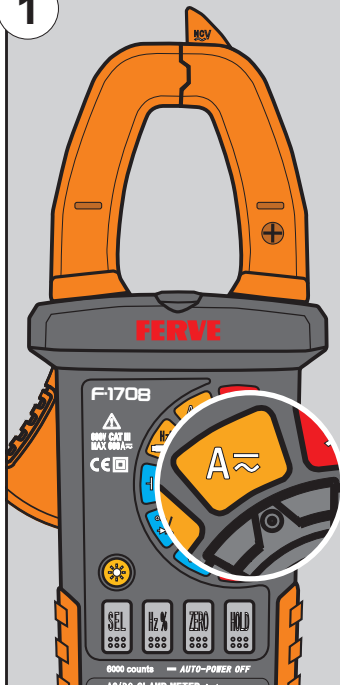

2

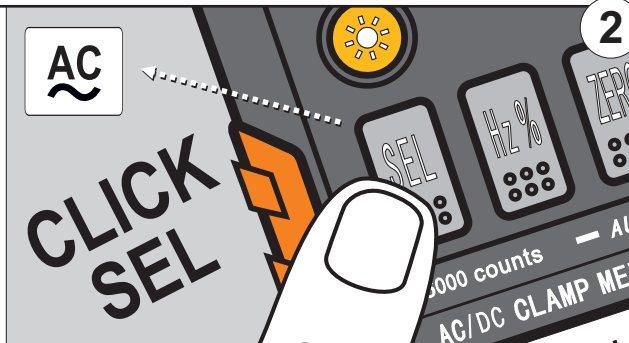

3

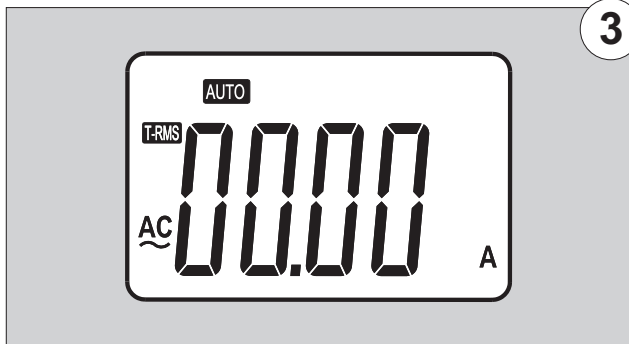

4


W ?


230 V



$$230 \text{ V} \times 8,7 \text{ A} = 2000 \text{ W}$$



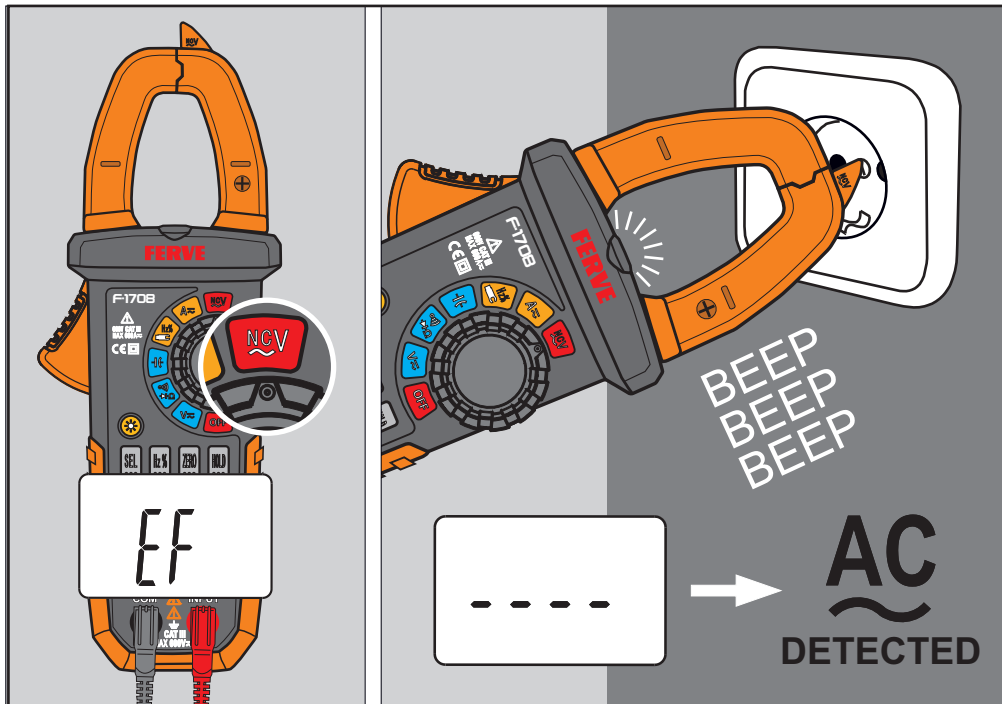

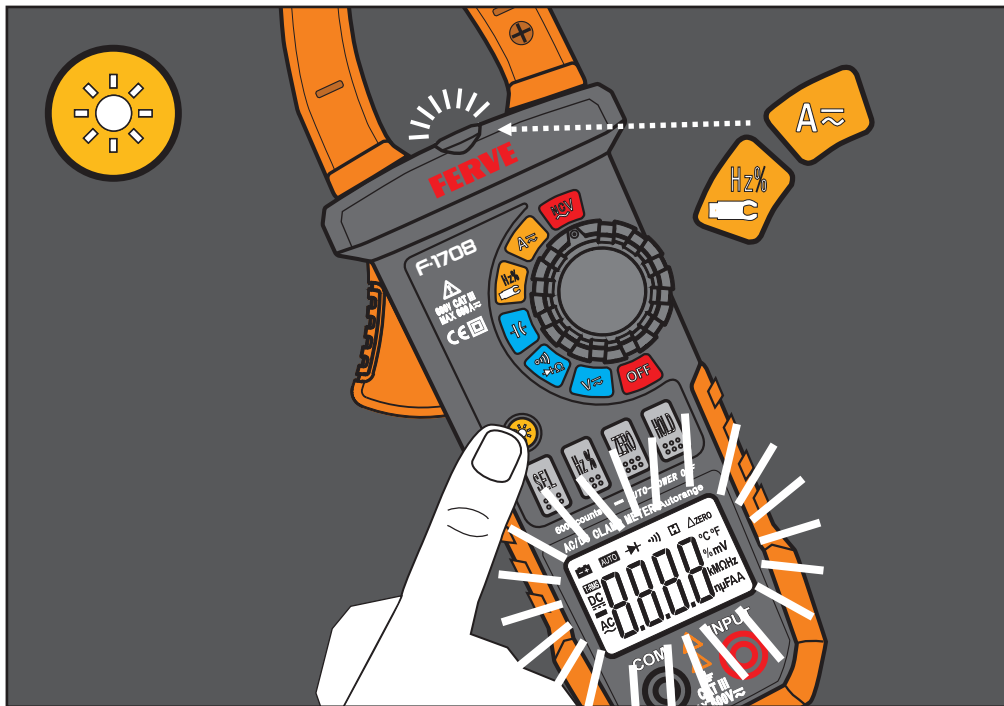







**AUTO
POWER
OFF**

30 Min.

NON-STOP

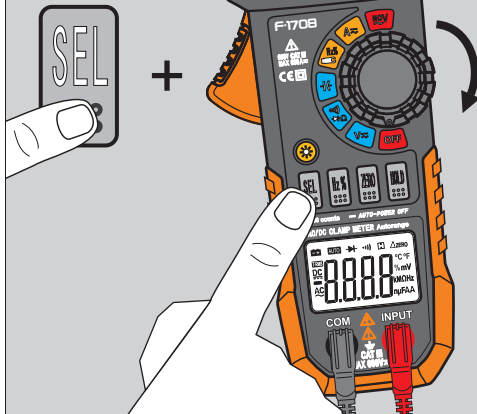

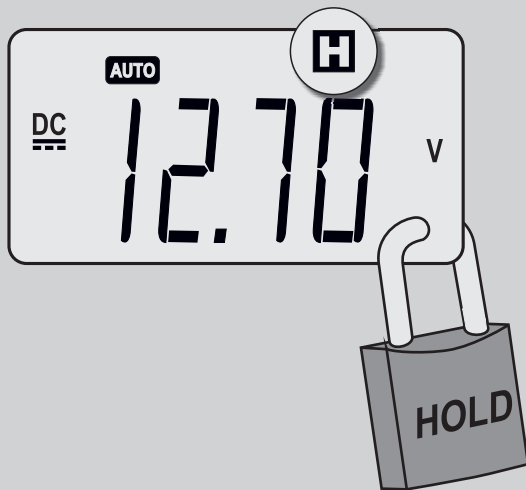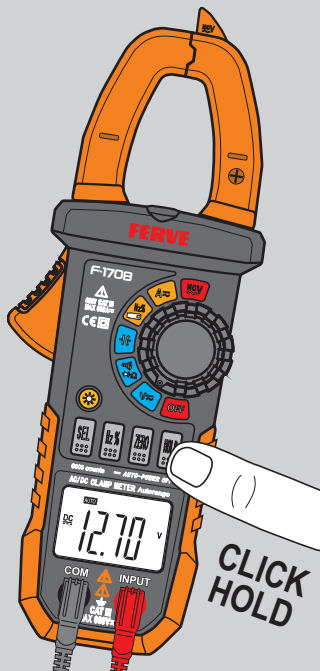

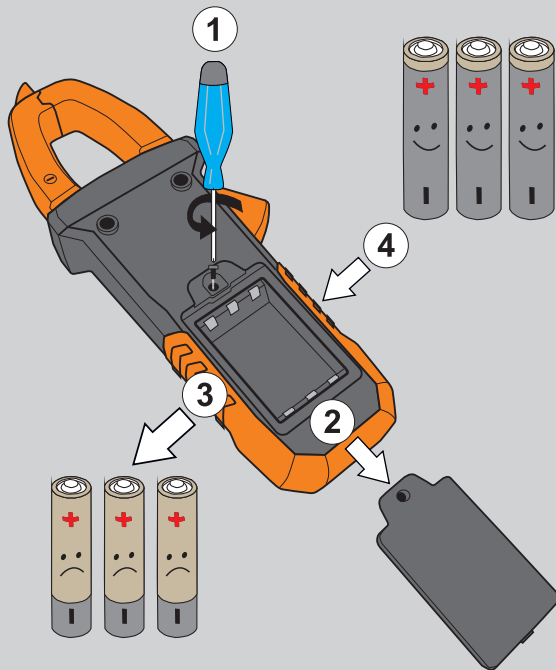

ESPECIFICACIONES/SPECIFICATIONS

FUNCIÓN FUNCTION	AUTO-RANGO AUTO-RANGE	RESOLUCIÓN RESOLUTION	PRECISIÓN ACCURACY	INFORMACIÓN INFORMATION
CORRIENTE DC DC CURRENT	60A	0,01A	± (3% of rdg ± 6 dig)	- MAX. Input current: 600A DC
	600A	0,1A		
CORRIENTE AC AC CURRENT	60A	0,01A	± (3% of rdg ± 6 dig)	- MAX. Input current: 600A AC - Frequency range: 40 Hz ~ 400Hz - Response: True RMS
	600A	0,1A		
VOLTAJE DC DC VOLTAGE	600mV/6V/60V	0,1mV/0,001V/0,01V	± (0,8% of rdg ± 2 dig)	- Input impedance: 10MΩ - MAX. Input voltage: 600V DC or True RMS
	600V	0,1V	± (1% of rdg ± 2 dig)	
VOLTAJE AC AC VOLTAGE	6V/60V/600V	1mV/10mV/0,1V	± (1,2% of rdg ± 10 dig)	- Input impedance: 10MΩ - MAX. Input voltage: 600V DC or True RMS - Frequency response: 40 Hz - 400Hz
RESISTENCIA RESISTANCE	600Ω/6kΩ/60kΩ/600kΩ/6MΩ	0,1Ω/0,001KΩ/0,01kΩ/0,1kΩ/0,001MΩ	± (1,2% of rdg ± 2 dig)	- Overload protection: 600V DC or True RMS AC
	60MΩ	0,01MΩ	± (2,0% of rdg ± 5 dig)	
CAPACIDAD CAPACITANCE	6,6μF/66μF/660μF/6,6mF/66mF	0,001μF/0,01μF/0,1μF/ 0,001mF/0,01mF	± (0,3% of rdg ± 10 dig)	- Overload protection: 600V DC or True RMS AC
FRECUENCIA FREQUENCY	660Hz/1KHz/>1KHz	0,1kHz/0,001KHz/0,001KHz	± (1,5% of rdg ± 5 dig)	- Input signal range: ≥10AAC (RMS) - MAX. Input current: 600V AC (RMS)
DIODE	1V	0,001V	Displaying approximate forward voltage of diode	- Overload protection: 600V DC or True RMS AC
				
	Built-in buzzer sounds when resistance is lower than 50		Open circuit voltage: 0,5V	
NCV	Frequency Range 50HZ - 500HZ	Voltage Range 90V - 1000V		Do not input voltage in NCV mode

E GARANTÍA

FERVE garantiza este aparato contra todo defecto de fabricación o de las piezas durante un período de 36 meses a partir de la fecha de compra, excepto consumibles tales como baterías y pilas. Quedan excluidos los daños provocados por errores de manejo, suciedad, conexión o energía inadecuada, accidentes y en general aquellos que provengan de causas externas al aparato. Cualquier otra prestación comprometida por el distribuidor será de la exclusiva responsabilidad del mismo. El presente documento tampoco cubre los deterioros ocasionados a otros bienes como consecuencia de un defecto del aparato garantizado. Esta garantía solamente tendrá validez acompañada de la factura de compra original o el recibo del establecimiento. Esta garantía perderá su vigencia cuando el aparato sea manipulado por personal o talleres ajenos a nuestros servicios técnicos.

GB WARRANTY

FERVE warrants this device against all-defective or faulty manufacturing or parts for a period of 36 months as of the purchase date, except consumables such as batteries. This warranty excludes damages caused by mishandling, dirt and filth, improper connection or power, accidents and, in general, any damages arising from causes that are external to the device. Any other warranty performance agreed to by the distributor shall be the exclusive liability of this party. Furthermore, this document does not cover wear or damage caused to other goods or assets as a result of a fault in the device under warranty. This warranty is only valid when accompanied by the original invoice or sales receipt. This warranty shall lose validity if the device is handled by personnel or shops not related to our technical service.



**DECLARACIÓN DE CONFORMIDAD
DECLARATION OF CONFORMITY
DÉCLARATION DE CONFORMITÉ
KONFORMITÄTSERKLÄRUNG
CONFORMITEITSVERKLARING
DECLARAÇÃO DE CONFORMIDADE**

Nosotros, We, Nous, Wir, Wij, Nós

FERVE, S.A.

declaramos, bajo nuestra única responsabilidad, que el producto
declare, under our sole responsibility, that the product
déclarons, sur notre seule responsabilité, que le produit
erklären, in alleiniger Verantwortung, dass das Produkt
verklaren, onder onze eigen verantwoordelijkheid, dat de producten
Declaramos, sob nossa única e exclusiva responsabilidade, que o produto

**Multímetro digital / Digital multimeter / Multimètre numérique
Digitales Universal- Mesgerät / Digitale Multimeter / Multimetro digital**

F-1708

al cual esta declaración se refiere, es conforme a las siguientes normas:
to which this declaration relates, is in conformity with the following standards:
auquel se réfère cette déclaration, est conforme à les normes :
auf das sich diese Erklärung bezieht, mit den folgenden Normen:
waar deze verklaring zich op richt, in overeenstemming is met de volgende normen:
a que se refere esta declaração, cumprem com as disposições das seguintes normativas:

**IEC62321:2008, IEC 62321-4:2013, IEC 62321-5:2013, IEC 62321-6:2015,
IEC 62321-7-1:2015, CTC19080343RR**

según las disposiciones de la Directiva:
following the provisions of Directive:
conformement aux dispositions de Directive :
Gemäss den Bestimmungen der Richtlinie:
volgens de richtlijn:
em conformidade com o disposto na directiva:

2014/32/EU, 2014/30/EU

FERVE

FERVE, S.A
Ctra. de Calafell, 15-25 - Apartado (P.O. Box) 7
43700 El Vendrell (España)
www.ferve.com
2017081 - 0125